

## 5200-Series 64 x 64 MEMS Optical Switch Module

---



Representing next-generation passive technology, the 5200-Series 64 x 64 microelectromechanical systems (MEMS) optical switch is compact, economical, and can be easily incorporated into a system.

### Features

- MEMS 3D architecture
- Small form factor
- Low loss
- Low power dissipation
- Nonblocking
- Scalable
- Protocol and bandwidth independent
- Data rate transparency
- Integrated control electronics

### Applications

- Optical cross connects
- Optical add/drop multiplexer
- Dynamic capacity provisioning
- Test equipment

### Description

The fully-integrated 5200-Series 64 x 64 MEMS-based optical switch component for optical networking systems features scalable, 3D MEMS architecture. It offers 64 input and 64 output ports in a small form factor, and contains the control and feedback electronics needed to be easily incorporated into a system.

The 64 x 64 MEMS optical switch module utilizes moving micromirrors capable of manipulating light, eliminating the need for OEO conversions, and resulting in bit-rate and protocol independence.

## Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause permanent damage to the device. These are absolute stress ratings only. Functional operation of the device is not implied at these or any other conditions in excess of those given in the operational sections of the data sheet. Exposure to absolute maximum ratings for extended periods can adversely affect device reliability.

Parameter	Symbol	Min	Max	Unit
Operating Temperature Range	T <sub>C</sub>	-5	70	°C
dc Power Supplies	—	—	5, ±15	V
Input Power	P <sub>IN</sub>	—	15	dBm

## Electrical/Optical Characteristics

Table 1. Electrical/Optical Characteristics

Parameter	Symbol	Min	Typ	Max	Unit
Insertion Loss	L <sub>INS</sub>	—	—	6	dB
Wavelength Range:	$\lambda$				
C-Band		1528	—	1562	nm
L-Band		1565	—	1607	nm
1.3 $\mu$ m		1280	—	1320	nm
Polarization-dependent Loss	PDL	—	—	0.2	dB
Optical Return Loss	ORL	30	—	—	dB
Isolation	ISO	50	—	—	dB
Polarization-mode Dispersion	PMD	—	—	0.1	ps
Mirror Switching Time	I <sub>TH</sub>	—	20	—	ms
Power Dissipation	P <sub>DISS</sub>	—	15	—	W
Optical Connectors	—	MTP			—
Electrical Connector	—	68-Pin SCSI-Type			—


## Pin Information

Table 2. Pin Descriptions

Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function
1	5 V	18	Out 4	35	GND	52	Out 12
2	5 V	19	Out 5	36	GND	53	Out 13
3	5 V	20	Out 6	37	GND	54	Out 14
4	5 V	21	Out 7	38	GND	55	Out 15
5	5 V	22	-15 V	39	GND	56	GND
6	In 0	23	-15 V	40	In 8	57	GND
7	In 1	24	GND	41	In 9	58	—
8	In 2	25	RxD-	42	In 10	59	—
9	In 3	26	RxD+	43	In 11	60	—
10	In 4	27	GND	44	In 12	61	Output Disable
11	In 5	28	TxD-	45	In 13	62	Alarm1
12	In 6	29	TxD+	46	In 14	63	Alarm 2
13	In 7	30	GND	47	In 15	64	RS-232 Transmit
14	Out 0	31	Clock	48	Out 8	65	GND
15	Out 1	32	Status	49	Out 9	66	RS-232 Receive
16	Out 2	33	15 V	50	Out 10	67	GND
17	Out 3	34	15 V	51	Out 11	68	GND

## Outline Diagram

Dimensions are in inches and (millimeters).

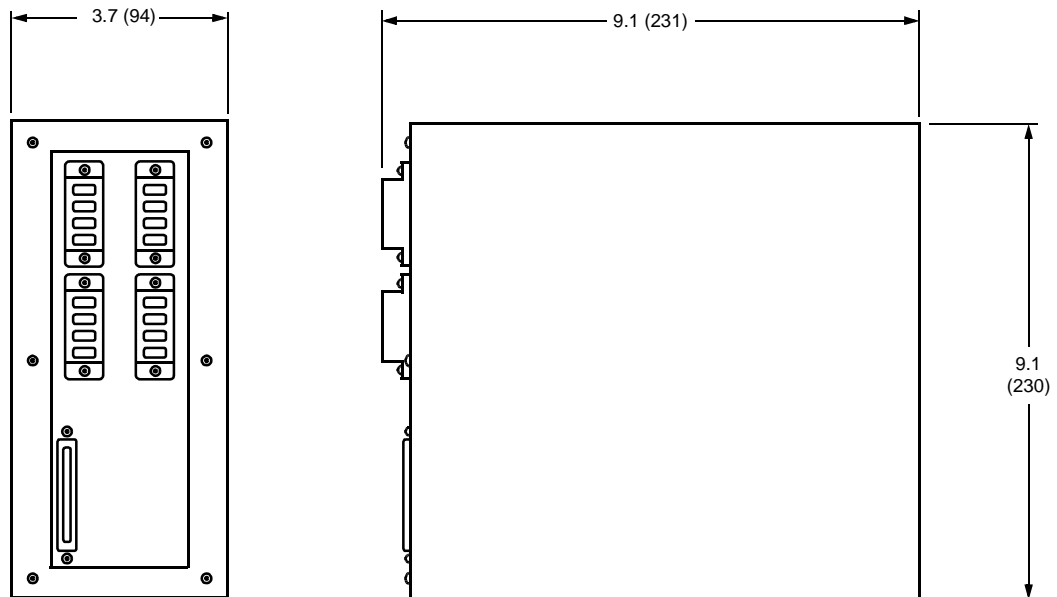

1-1258(F).a

---

For additional information, contact your Agere Systems Account Manager or the following:

INTERNET: <http://www.agere.com>

E-MAIL: [docmaster@micro.lucent.com](mailto:docmaster@micro.lucent.com)

N. AMERICA: Agere Systems Inc., 555 Union Boulevard, Room 30L-15P-BA, Allentown, PA 18109-3286  
**1-800-372-2447**, FAX 610-712-4106 (In CANADA: **1-800-553-2448**, FAX 610-712-4106)

ASIA PACIFIC: Agere Systems Singapore Pte. Ltd., 77 Science Park Drive, #03-18 Cintech III, Singapore 118256  
**Tel. (65) 778 8833**, FAX (65) 777 7495

CHINA: Agere Systems (Shanghai) Co., Ltd., 33/F Jin Mao Tower, 88 Century Boulevard Pudong, Shanghai 200121 PRC  
**Tel. (86) 21 50471212**, FAX (86) 21 50472266

JAPAN: Agere Systems Japan Ltd., 7-18, Higashi-Gotanda 2-chome, Shinagawa-ku, Tokyo 141, Japan  
**Tel. (81) 3 5421 1600**, FAX (81) 3 5421 1700

EUROPE: Data Requests: DATALINE: **Tel. (44) 7000 582 368**, FAX (44) 1189 328 148  
Technical Inquiries: OPTOELECTRONICS MARKETING: **(44) 1344 865 900** (Ascot UK)

---

Agere Systems Inc. reserves the right to make changes to the product(s) or information contained herein without notice. No liability is assumed as a result of their use or application.