



## IF Filters for Basestations

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments
B39401B5002U310		2006-12-01	2007-02-28	2007-05-31

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at [www.epcos.com/sales](http://www.epcos.com/sales).



# SAW Components

Data Sheet B5002





**SAW Components**

**B5002**

**Low-Loss Filter**

**398,0 MHz**

**Data Sheet**


**Features**

- Low-loss IF filter for W-CDMA base station, Tx
- 20 MHz usable bandwidth
- Very low passband ripple
- Ceramic SMD package

**Terminals**

- Gold plated


Ceramic package **QCC8C**

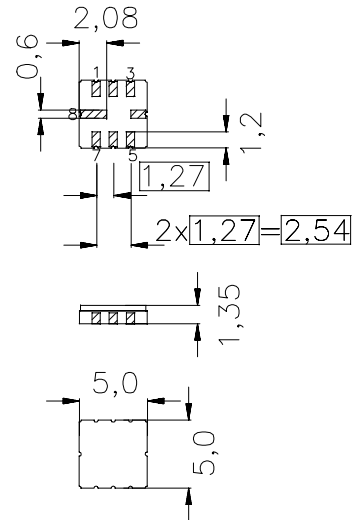

Dim. in mm, approx. weight 0,1 g

**Pin configuration**

- |      |                |
|------|----------------|
| 2    | Input          |
| 3    | Input ground   |
| 6    | Output         |
| 7    | Output ground  |
| 1, 5 | To be grounded |
| 4, 8 | Case ground    |



Type	Ordering code	Marking and Package according to	Packing according to
B5002	B39401-B5002-U310	C61157-A7-A56	F61074-V8169-Z000

Electrostatic Sensitive Device (ESD)

**Maximum ratings**

Operable temperature range	$T$	-40 / +85	°C	
Storage temperature range	$T_{stg}$	-40 / +85	°C	
DC voltage	$V_{DC}$	5	V	
Source power	$P_s$	10	dBm	


**SAW Components**
**B5002**
**Low-Loss Filter**
**398,0 MHz**
**Data Sheet**
**Characteristics**

Operating temperature range:

$T = -40 \dots +85 \text{ } ^\circ\text{C}$

Terminating source impedance:

$Z_S = 50 \text{ } \Omega$  unbalanced and matching network

Terminating load impedance:


$Z_L = 50 \text{ } \Omega$  unbalanced and matching network

		min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$	—	398,0	—	MHz
<b>Minimum insertion attenuation</b>	$\alpha_{\min}$	—	3,3	4,0	dB
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$				
<b>Maximum insertion attenuation (in passband)</b>	$\alpha_{\max}$	—	3,8	5,0	dB
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$				
<b>Pass bandwidth</b>	$\alpha_{\text{rel}} \leq 1,0 \text{ dB}$	$B_{1,0\text{dB}}$	20	26	— MHz
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	—	0,2	0,5	dB
	$f_N - 1,92 \text{ MHz} \dots f_N + 1,92 \text{ MHz}$	—	0,4	1,0	dB
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$				
<b>Deviation from linear phase (rms)</b>	$\Delta\varphi$	—	0,1	0,5	$^\circ$
	$f_N - 1,92 \text{ MHz} \dots f_N + 1,92 \text{ MHz}$	—	1,0	3,0	$^\circ$
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$				
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>	$\alpha_{\text{rel}}$				
	100 MHz ... 335 MHz	15	60	—	dB
	335 MHz ... 338 MHz	38	60	—	dB
	338 MHz ... 365 MHz	15	60	—	dB
	365 MHz ... 368 MHz	35	45	—	dB
	448 MHz ... 3 GHz	15	45	—	dB
<b>Input return loss (in passband)</b>					
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	6	8	—	dB
<b>Output return loss (in passband)</b>					
	$f_N - 7,50 \text{ MHz} \dots f_N + 7,50 \text{ MHz}$	8	10	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$	—	-70	—	ppm/K



Data Sheet

Matching network to 50  $\Omega$

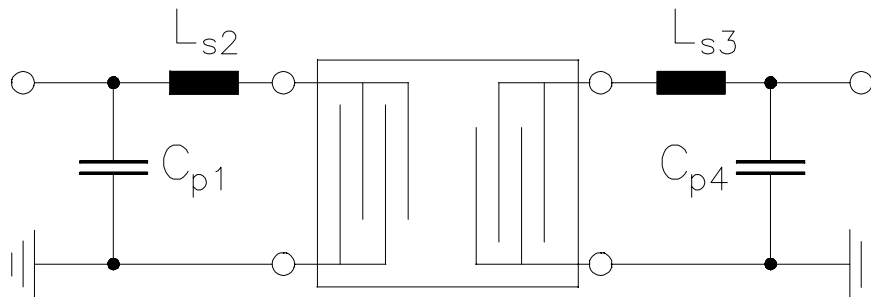

$$C_{p1} = 3,3 \text{ pF}$$

$$L_{s2} = 10 \text{ nH}$$

$$L_{s3} = 12 \text{ nH}$$


$$C_{p4} = 2,2 \text{ pF}$$

Element values depend upon board layout




Data Sheet

Transfer function

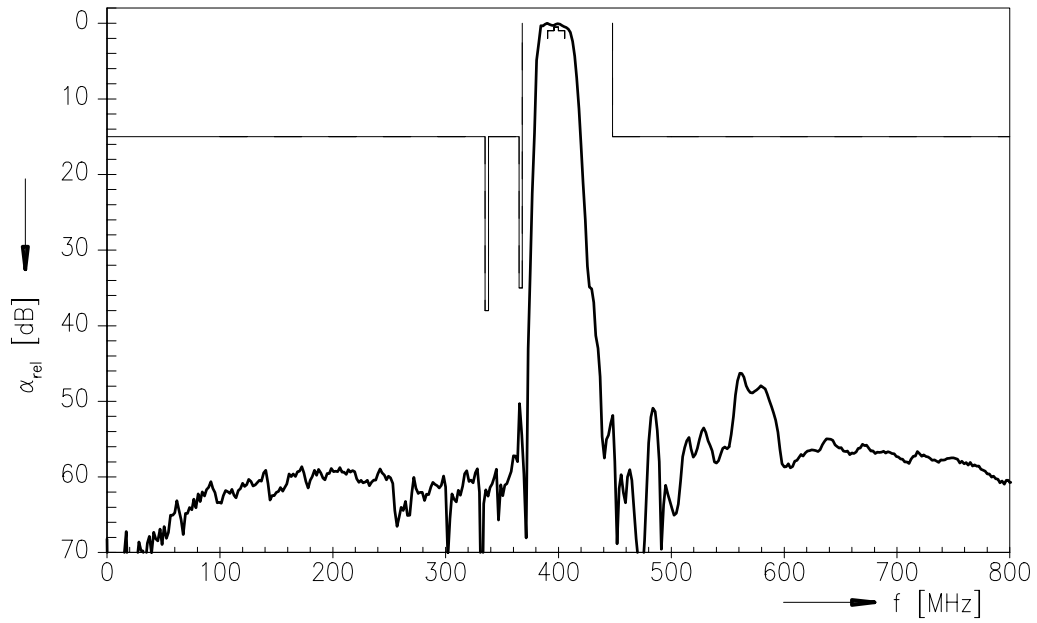

Transfer function (pass band)

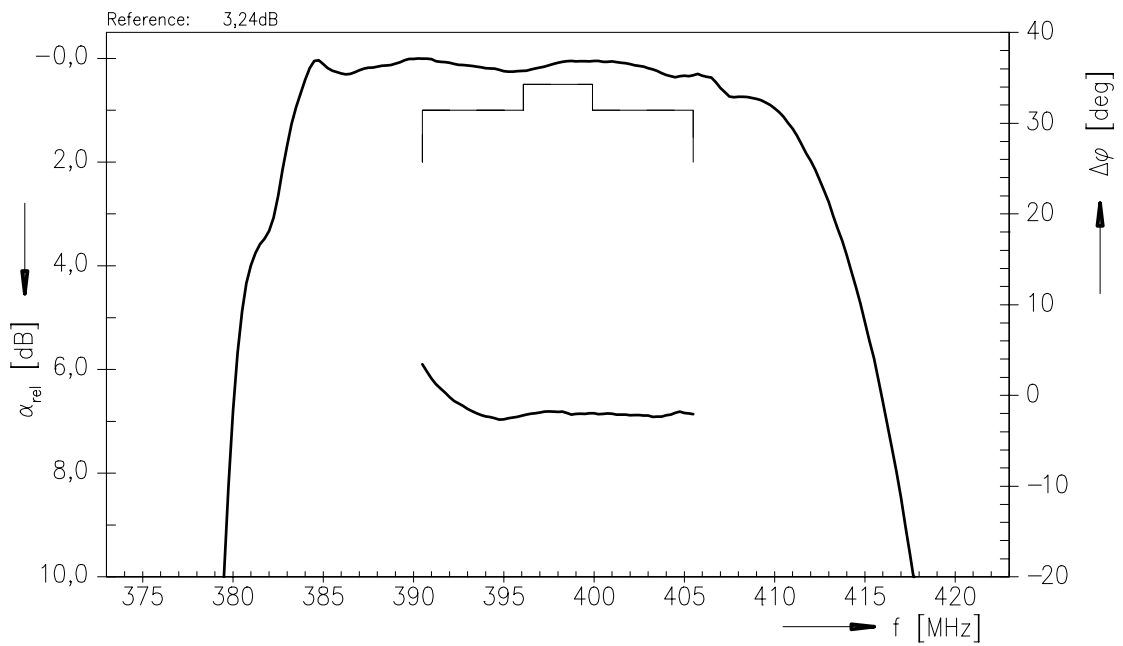



**SAW Components**

**B5002**

**Low-Loss Filter**

**398,0 MHz**

Data Sheet

**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW MC**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.