


### Features

- Fast switching for high efficiency
- Low Power Loss,High Efficiency
- High current capability
- For Use in Low Voltage Application
- Plastic Case Material has UL Flammability

Classification Rating 94V-0

### Mechanical Data

- Case: Molded plastic SMA
- Terminals: Plated leads solderable per MIL-STD-750,Method 2026 guaranteed
- Polarity:Cathode Band or Cathode Notch
- Mounting Position: Any
- Making: Type Number

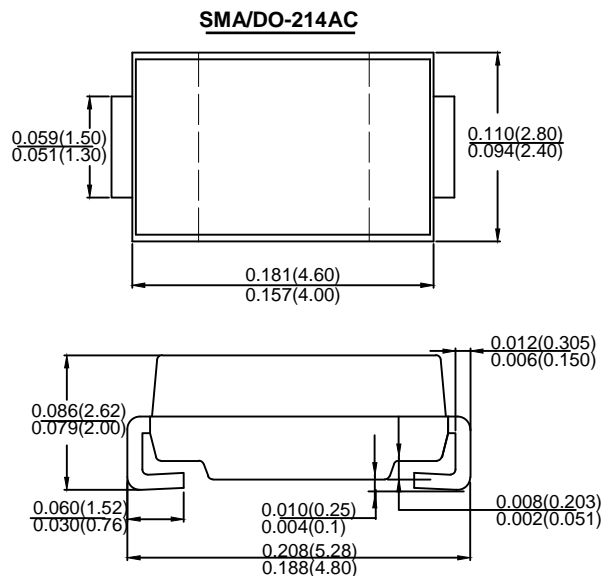

Dimensions in inches and (millimeters)

### Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load

For capacitive load derate current by 20%

Type Number	SYMBOL	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	RS1M	Unit
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Average Rectified Output Current @ $T_A = 75^\circ C$	$I_o$	1.0							A
Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30							A
Forward Voltage @ $I_F = 1.0A$	$V_{FM}$	1.3							V
Peak Reverse Current @ $T_A = 25^\circ C$	$I_R$	5.0							uA
At Rated DC Blocking Voltage @ $T_A = 100^\circ C$		150							
Maximum Reverse Recovery Time (Note 1)	$T_{rr}$	150			250		500		ns
Typical Junction Capacitance (Note 2)	$C_J$	12							pF
Typical Thermal Resistance Junction to Ambient (Note 3)	$R_{\theta JA}$	100							$^\circ C/W$
	$R_{\theta JL}$	32							
Operating Temperature Range	$T_J$	-55 to +150							$^\circ C$
Storage Temperature Range	$T_{STG}$	-55 to +150							$^\circ C$

Note: 1.Reverse Recovery Test Conditions:  $I_F = 0.5A, I_R = 1.0A, I_{RR} = 0.25A$ .

2. Measured at 1.0 MHz and Applied reverse Voltage of 4.0V D.C

3. 8.0mm<sup>2</sup> (.013mm thick) land areas.

