

isc N-Channel MOSFET Transistor

SPA17N80C3

• FEATURES

- Static drain-source on-resistance: $R_{DS(on)} \leq 0.29\Omega$
- Enhancement mode
- Fast Switching Speed
- 100% avalanche tested
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

• APPLICATIONS



- Ideal for high-frequency switching and synchronous rectification

• ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ C$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{DSS}	Drain-Source Voltage	800	V
V_{GS}	Gate-Source Voltage	± 20	V
I_D	Drain Current-Continuous	17	A
I_{DM}	Drain Current-Single Pulsed	51	A
P_D	Total Dissipation @ $T_c=25^\circ C$	42	W
T_j	Max. Operating Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55~150	°C

• THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	MAX	UNIT
$R_{th(ch-c)}$	Channel-to-case thermal resistance	2.98	°C/W
$R_{th(ch-a)}$	Channel-to-ambient thermal resistance	62	°C/W

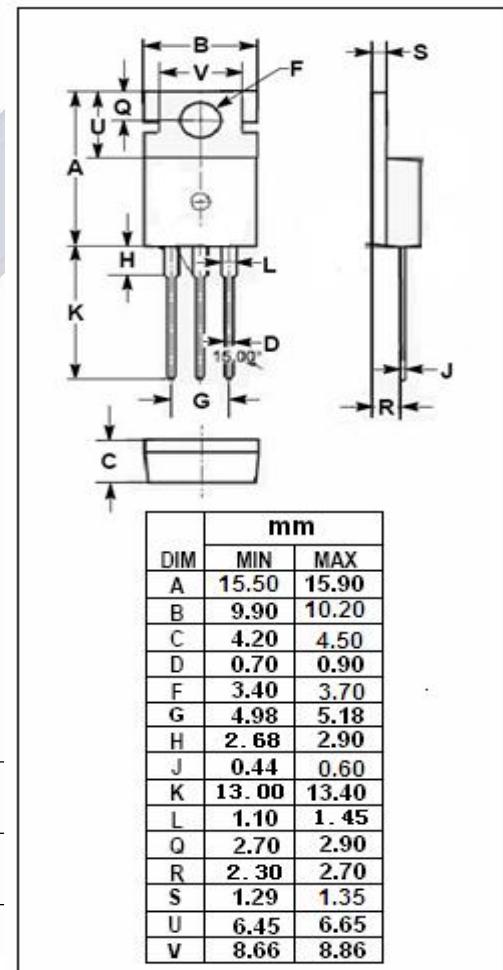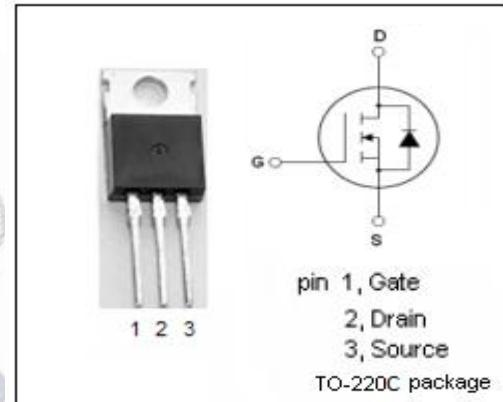

isc N-Channel MOSFET Transistor
SPA17N80C3
ELECTRICAL CHARACTERISTICS

T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNIT
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V; I _D =250 μ A	800			V
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} ; I _D =1mA	2.1		3.9	V
R _{DS(on)}	Drain-Source On-Resistance	V _{GS} =10V; I _D =11A			0.29	Ω
I _{GSS}	Gate-Source Leakage Current	V _{GS} = 20V; V _{DS} =0V			100	nA
I _{DSS}	Drain-Source Leakage Current	V _{DS} =800V; V _{GS} = 0V			25	μ A
		V _{DS} =800V; V _{GS} = 0V; T _j = 150°C			250	
V _{SD}	Diode forward voltage	I _S =11A; V _{GS} = 0V			1.2	V