


MECHANICAL DATA

Dimensions in mm

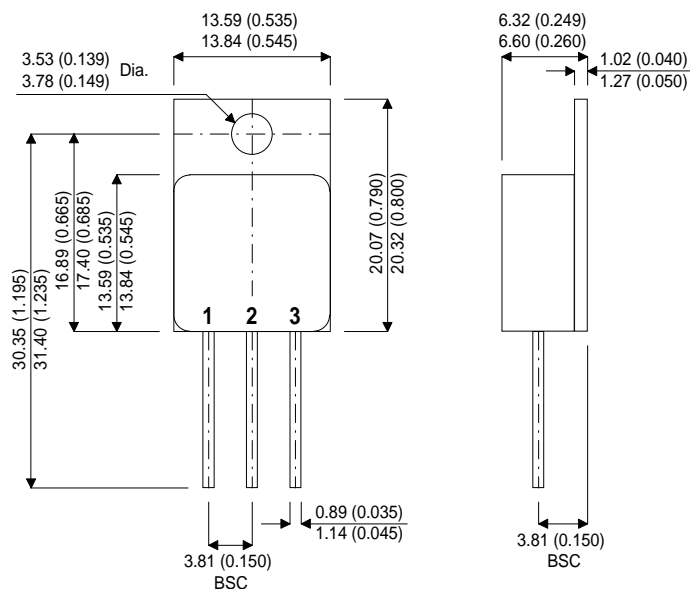

TO-254METAL PACKAGE

Pin 1 – Anode 1 Pin 2 – Cathode Pin 3 – Anode 2

**DUAL SCHOTTKY
BARRIER RECTIFIER
IN A TO254
HERMETICALLY
SEALED PACKAGE
FOR HI-REL APPLICATIONS**

FEATURES

- HERMETIC TO254 METAL PACKAGE
- ISOLATED CASE
- 16A, 45V
- COMMON CATHODE
- MILITARY OPTIONS AVAILABLE

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)		MBR1645
V_{RRM}	Peak Repetitive Reverse Voltage	45V
V_{RWM}	Working Peak Reverse Voltage	45V
$I_{F(AV)}$	Average rectified Forward Current ($T_C = 125^{\circ}C$)	16A
I_{FRM}	Peak Repetitive Forward Current ($T_C = 125^{\circ}C$)	32A
T_{FSM}	Nonrepetitive Peak Surge Current	150A
I_{RRM}	Peak Repetitive Reverse Surge Current	10A
$R_{\theta JC}$	Thermal Resistance, Junction to Case	2°C/W

ELECTRICAL CHARACTERISTICS (Per Diode)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
V_F Forward Voltage ⁽¹⁾	$I_F = 16A$ $T_C = 125^{\circ}C$			0.57	V
	$I_F = 16A$ $T_C = 25^{\circ}C$			0.63	
I_R Reverse Current	$V_R = V_{RRM}$ $T_C = 125^{\circ}C$			40	mA
	$V_R = V_{RRM}$ $T_C = 25^{\circ}C$			0.2	

(1)Pulse Test: Pulse Width = 300 μs . Duty Cycle $\leq 2.0\%$