


# 1SS187

## Features

Fast reverse recovery time: $t_{rr}=1.6\text{ns}(\text{typ.})$

Diode capacitance : $C_d=2.2\text{pF}(\text{typ.})$

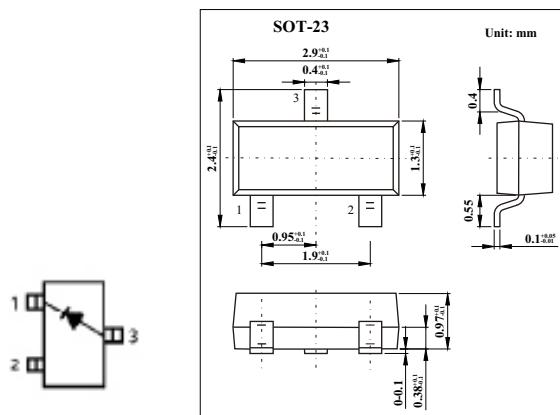

## Absolute Maximum Ratings $T_a = 25$

Parameter	Symbol	Rating	Unit
Maximum reverse voltage	$V_{RM}$	85	V
Reverse voltage	$V_R$	80	V
Average forward current	$I_o$	100	mA
Maximum forward current	$I_{FM}$	300	mA
Surge current	$I_{FSM}$	2	A
Power dissipation	$P_D$	150	mW
Junction temperature	$T_J$	125	
Storage temperature range	$T_{stg}$	-55 to 125	

## Electrical Characteristics $T_a = 25$

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F=1\text{mA}$		0.61		V
		$I_F=10\text{mA}$		0.74		
		$I_F=100\text{mA}$		0.92	1.2	
Reverse voltage leakage current	$I_R$	$V_R=30\text{V}$		0.1		$\mu\text{A}$
		$V_R=80\text{V}$			0.5	
Diode capacitance	$C_d$	$V_R=0\text{V}, f=1\text{MHz}$	2.2	4		pF
Reverse recovery time	$t_{rr}$	$I_F=10\text{mA}$		1.6	4	ns

## Marking

Marking	D3
---------	----