

GENERAL PURPOSE SILICON RECTIFIER

<p>FEATURES</p> <ul style="list-style-type: none"> • Low cost construction • Low forward voltage drop • Low reverse leakage • High forward surge current capability • High temperature soldering guaranteed: 260°C/10 seconds/0.375" (9.5mm) lead length at 5 lbs (2,3kg) tension <p>MECHANICAL DATA</p> <ul style="list-style-type: none"> • Case: Transfer molded plastic • Epoxy: UL94V-0 rate flame retardant • Polarity: Color band denotes cathode end • Lead: Plated axial lead, solderable per MIL-STD-202E method 208C • Mounting position: Any • Weight: 0.07 ounce, 2.0 grams 	<table style="width: 100%; border: none;"> <tr> <td style="text-align: center; border: none;"> VOLTAGE RANGE 50 to 1000 Volts </td> <td style="text-align: center; border: none;"> CURRENT 6.0 Amperes </td> </tr> </table> <div style="text-align: center; margin-top: 20px;"> <p style="font-size: small;">Dimensions in inches and (millimeters)</p> </div>	VOLTAGE RANGE 50 to 1000 Volts	CURRENT 6.0 Amperes																																																																																																																						
VOLTAGE RANGE 50 to 1000 Volts	CURRENT 6.0 Amperes																																																																																																																								
<p>MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS</p> <p>Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load derate current by 20%.</p>																																																																																																																									
	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 15%;">SYMBOLS</th> <th>6A05</th> <th>6A1</th> <th>6A2</th> <th>6A4</th> <th>6A6</th> <th>6A8</th> <th>6A10</th> <th>UNITS</th> </tr> </thead> <tbody> <tr> <td>Maximum Repetitive Peak Reverse Voltage</td> <td>V_{RRM}</td> <td>50</td> <td>100</td> <td>200</td> <td>400</td> <td>600</td> <td>800</td> <td>1000</td> <td>Volts</td> </tr> <tr> <td>Maximum RMS Voltage</td> <td>V_{RMS}</td> <td>35</td> <td>70</td> <td>140</td> <td>280</td> <td>420</td> <td>560</td> <td>700</td> <td>Volts</td> </tr> <tr> <td>Maximum DC Blocking Voltage</td> <td>V_{DC}</td> <td>50</td> <td>100</td> <td>200</td> <td>400</td> <td>600</td> <td>800</td> <td>1000</td> <td>Volts</td> </tr> <tr> <td>Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at $T_A=60^\circ C$</td> <td>$I_{(AV)}$</td> <td colspan="6">6.0</td> <td>Amps</td> </tr> <tr> <td>Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)</td> <td>I_{FSM}</td> <td colspan="6">400</td> <td>Amps</td> </tr> <tr> <td>Maximum Instantaneous Forward Voltage at 6.0A</td> <td>V_F</td> <td colspan="6">0.95</td> <td>Volts</td> </tr> <tr> <td rowspan="2">Maximum DC Reverse Current at rated DC blocking voltage</td> <td rowspan="2">I_R</td> <td colspan="6">$T_A=25^\circ C$</td> <td>10</td> <td>μAmps</td> </tr> <tr> <td colspan="6">$T_A=100^\circ C$</td> <td>1.0</td> <td>mAmps</td> </tr> <tr> <td>Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at $T_L=105^\circ C$</td> <td>$I_{R(AV)}$</td> <td colspan="6">1.0</td> <td>mAmps</td> </tr> <tr> <td>Typical Junction Capacitance(NOTE1)</td> <td>C_J</td> <td colspan="6">150</td> <td>pF</td> </tr> <tr> <td>Typical Thermal Resistance(NOTE2)</td> <td>$R_{\theta JA}$</td> <td colspan="6">10</td> <td>$^\circ C/W$</td> </tr> <tr> <td>Operating and Storage Temperature Range</td> <td>T_J, T_{STG}</td> <td colspan="6">-65 to +175</td> <td>$^\circ C$</td> </tr> </tbody> </table>	SYMBOLS	6A05	6A1	6A2	6A4	6A6	6A8	6A10	UNITS	Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts	Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts	Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts	Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at $T_A=60^\circ C$	$I_{(AV)}$	6.0						Amps	Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	400						Amps	Maximum Instantaneous Forward Voltage at 6.0A	V_F	0.95						Volts	Maximum DC Reverse Current at rated DC blocking voltage	I_R	$T_A=25^\circ C$						10	μ Amps	$T_A=100^\circ C$						1.0	mAmps	Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at $T_L=105^\circ C$	$I_{R(AV)}$	1.0						mAmps	Typical Junction Capacitance(NOTE1)	C_J	150						pF	Typical Thermal Resistance(NOTE2)	$R_{\theta JA}$	10						$^\circ C/W$	Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +175						$^\circ C$
SYMBOLS	6A05	6A1	6A2	6A4	6A6	6A8	6A10	UNITS																																																																																																																	
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	Volts																																																																																																																
Maximum RMS Voltage	V_{RMS}	35	70	140	280	420	560	700	Volts																																																																																																																
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	Volts																																																																																																																
Maximum Average Forward Rectified Current 0.375" (9.5mm) lead length at $T_A=60^\circ C$	$I_{(AV)}$	6.0						Amps																																																																																																																	
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	400						Amps																																																																																																																	
Maximum Instantaneous Forward Voltage at 6.0A	V_F	0.95						Volts																																																																																																																	
Maximum DC Reverse Current at rated DC blocking voltage	I_R	$T_A=25^\circ C$						10	μ Amps																																																																																																																
		$T_A=100^\circ C$						1.0	mAmps																																																																																																																
Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at $T_L=105^\circ C$	$I_{R(AV)}$	1.0						mAmps																																																																																																																	
Typical Junction Capacitance(NOTE1)	C_J	150						pF																																																																																																																	
Typical Thermal Resistance(NOTE2)	$R_{\theta JA}$	10						$^\circ C/W$																																																																																																																	
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +175						$^\circ C$																																																																																																																	
<p>NOTES:</p> <p>1. Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts. 2. Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) lead length, P.C. board mounted with 1.1" X1.1" (30X30mm) copper heatsink.</p>																																																																																																																									

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

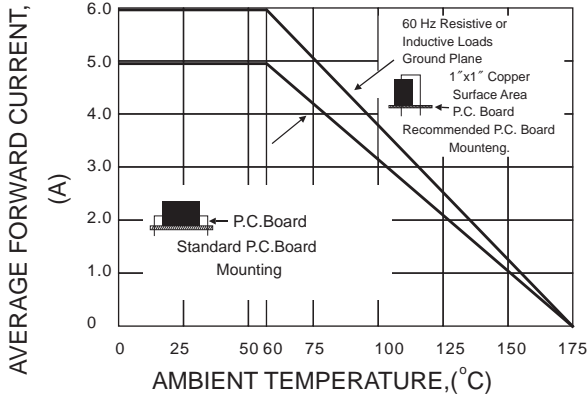


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

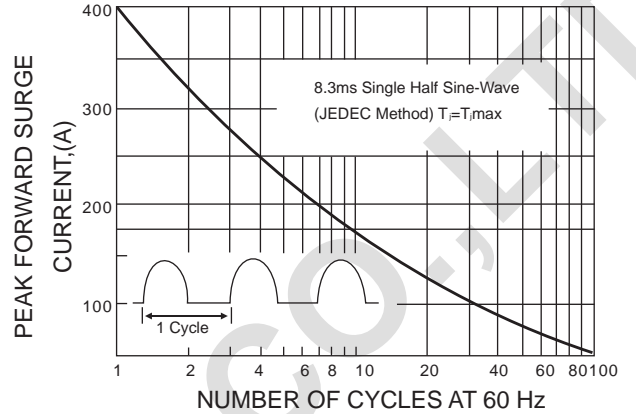


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

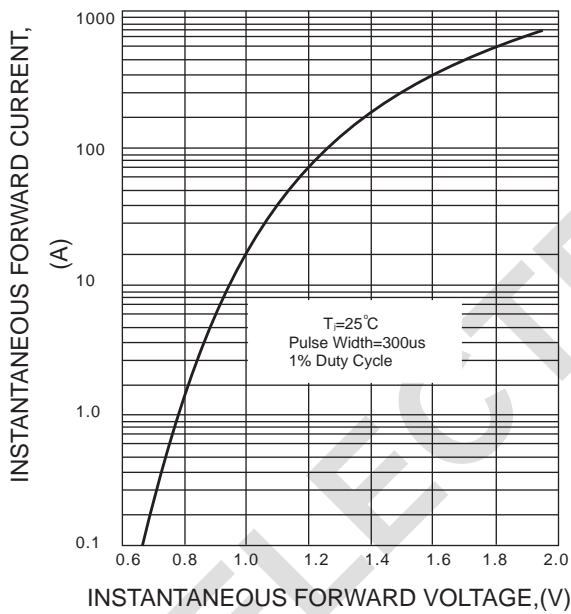


FIG.4-TYPICAL REVERSE CHARACTERISTICS

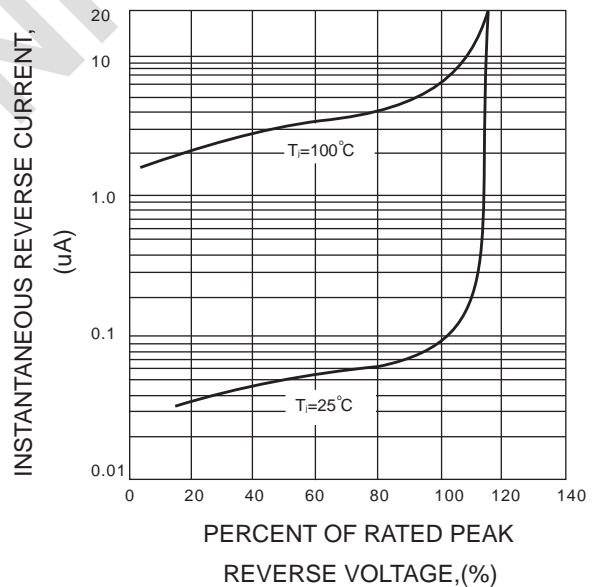


FIG.5-TYPICAL JUNCTION CAPACITANCE

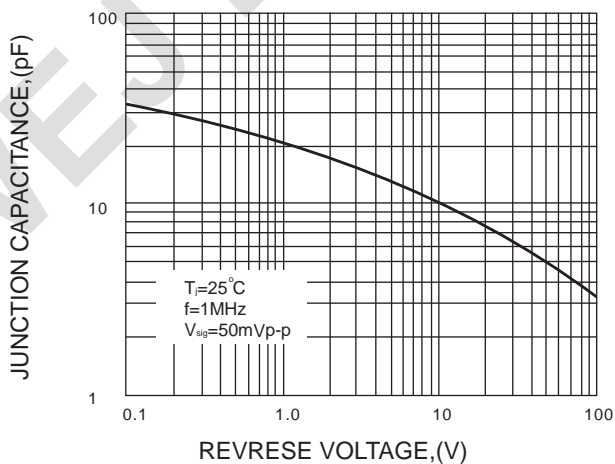


FIG.6-TYPICAL THERMAL RESISTANCE VS LEAD LENGTH

